



H130

MANUAL DEEP INDENTING HYDRAULIC TOOL



DEEP INDENTING
16 > 240 mm²

HEXAGONAL CRIMPING
6 > 400 mm²

> Identical force, stroke and capacities as the XH130 and the battery operated tool BPP130U.

- HEAD ACCORDING TO HN 68-S-90** (> EDF specifications)
For underground lines (bimetallic lugs and sleeves).
- MAX. PASSAGE OF 34 mm**
In the head for large sections.
- MECHANICAL STOP (NEW FEATURE)**
The piston stops at stroke end.
- 2 SPEEDS HYDRAULIC SYSTEM**
For a fast advance.

STROKE	26 mm
MAX. PASSAGE	34 mm
FORCE	130 kN
DIMENSIONS (L x l x h in mm)	560 x 80 x 165
WEIGHT (with battery)	5.260 kg



ASSEMBLY № 1 FOR INDENTING APPLICATION



Refer to **PAGES 96**



ASSEMBLY № 2 FOR CRIMPING APPLICATION

130 kN crimping die sets can be used in this tool thanks to the adapter **A12D2**.

Refer to **PAGES 89 – 95**

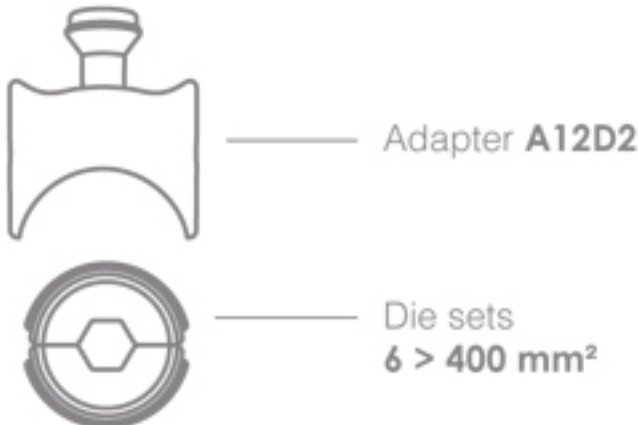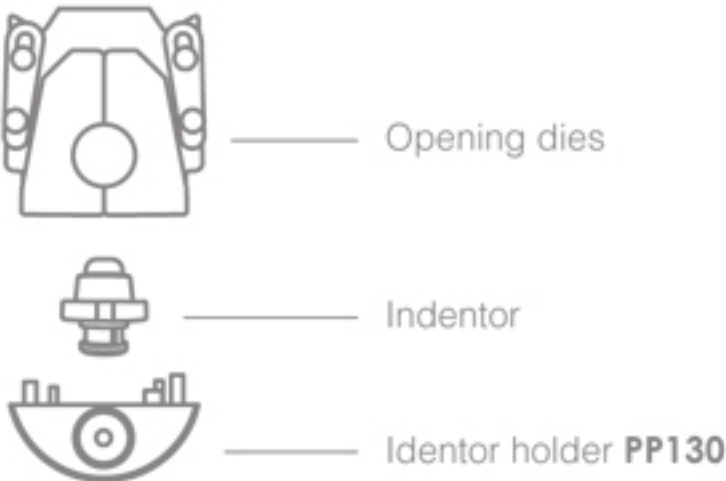

DIE SETS – Refer to **PAGES 89 – 97**

> Common interchangeable indenter and opening dies for **H130, XH130 & BPP130U**.



DIMENSIONS (mm)	680 x 160 x 430
WEIGHT	3.600 kg

- > Tray for 24 die sets
- > Delivered separately