




Die sets  
50 > 630 mm<sup>2</sup>



HEXAGONAL CRIMPING  
50 > 630 mm<sup>2</sup>

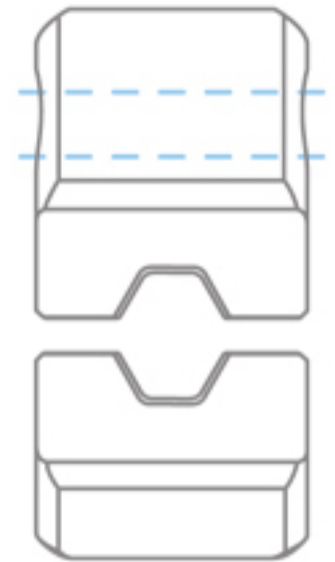

# XH250

## CRIMPING HYDRAULIC HEAD

700  
bar

- PORTABLE & LIGHT**  
Leather strap to retain the die pin.
- STURDY, WIDE CAPACITIES**  
For medium and high voltage applications.
- CLOSING BY LOCKING PIN**  
Locking system of the upper die.
- SELF ALIGNING**  
Lower die centering in the head.

<b>STROKE</b>	28 mm
<b>FORCE</b>	250 kN
<b>DIMENSIONS</b> (L × l × h in mm)	287 × 100 × 130
<b>WEIGHT</b>	6.800 kg

APPLICATIONS	SECTIONS
Copper tubular lugs – NFC 20-130	50 > 630 mm <sup>2</sup>
Copper or alu. lugs and sleeves – DIN 48083	KZ8 > KZ44



<b>DIMENSIONS</b> (mm)	405 × 270 × 105
<b>WEIGHT</b>	3,120 kg

> Delivered separately



**DIE SETS**  
> Refer to **PAGES 89 – 97**