




Die sets
95 > 1000 mm²

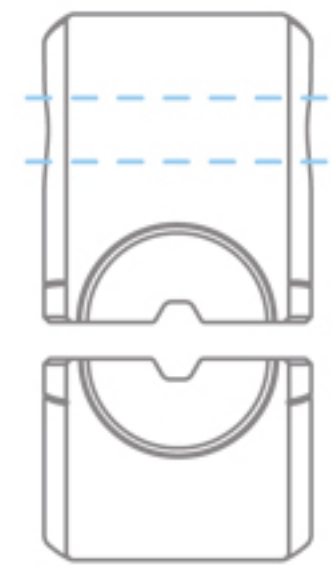

XH450

CRIMPING
HYDRAULIC HEAD

700
bar

HEXAGONAL CRIMPING
95 > 1000 mm²

-  **STURDY, WIDE CAPACITIES**
For medium and high voltage applications.
-  **SIDE CONNECTING**
Enables the laying of the head on a workbench.
-  **CLOSING BY LOCKING PIN**
Locking system of the upper die.
-  **SELF ALIGNING**
Lower die centering in the head.

STROKE	35 mm
FORCE	450 kN
DIMENSIONS (L x l x h in mm)	285 x 115 x 120
WEIGHT	11 kg

APPLICATIONS	SECTIONS
 Copper tubular lugs – NFC 20-130	95 > 1000 mm ²
 Copper or alu. lugs and sleeves – DIN 48083	KZ14 > KZ60

 **DIE SETS**
> Refer to **PAGES 89 – 97**